

## AE-DC4328-K5

### 1440p/2K + 1080p 2-ch Dashboard Camera



- 1440p/2K Front HD Camera, 1080p Rear Camera
- Built-in Microphone and Speaker
- 3-inch IPS Touch Screen 854 x 480
- Built-in G-Sensor and GPS
- Voice Recognition
- Built-in 2.4 GHz Wi-Fi Module
- MicroSD (TF) Card Storage, Maximum 256 GB
- Mobile App to Real-Time View Video, Video Playback, and Parameter Settings
- 12-Hour/24-Hour/48-Hour Parking Monitoring
- Plug and Record; Automatic Recording After Power On

The Hikvision AE-DC4328-K5 is a high resolution 2-channel dashcam that features easy installation and operation. The device communicates with its phone app through built-in Wi-Fi.

The built-in G-Sensor automatically locks the currently recording video when it senses a crash or strong vibration, to prevent it from being overwritten. MicroSD (TF) cards up to 256 GB are supported.

The built-in mic and speaker records and plays back audio.

Fields of View (FOV) are 123° diagonal, adjustable up and down, and 15° left and right angles.

The DashCam supports the following voice commands: "Open Screen," "Show Front Camera," "Turn Off Display," "Show Rear Camera," "Turn Off Recording," "Take Picture," "Show All Camera," "Lock The Video," "Open Recording," "Turn Off Recording."

Also featured is microSD card storage, with a maximum of 256 GB. It is a seamless connection that records without missing seconds.

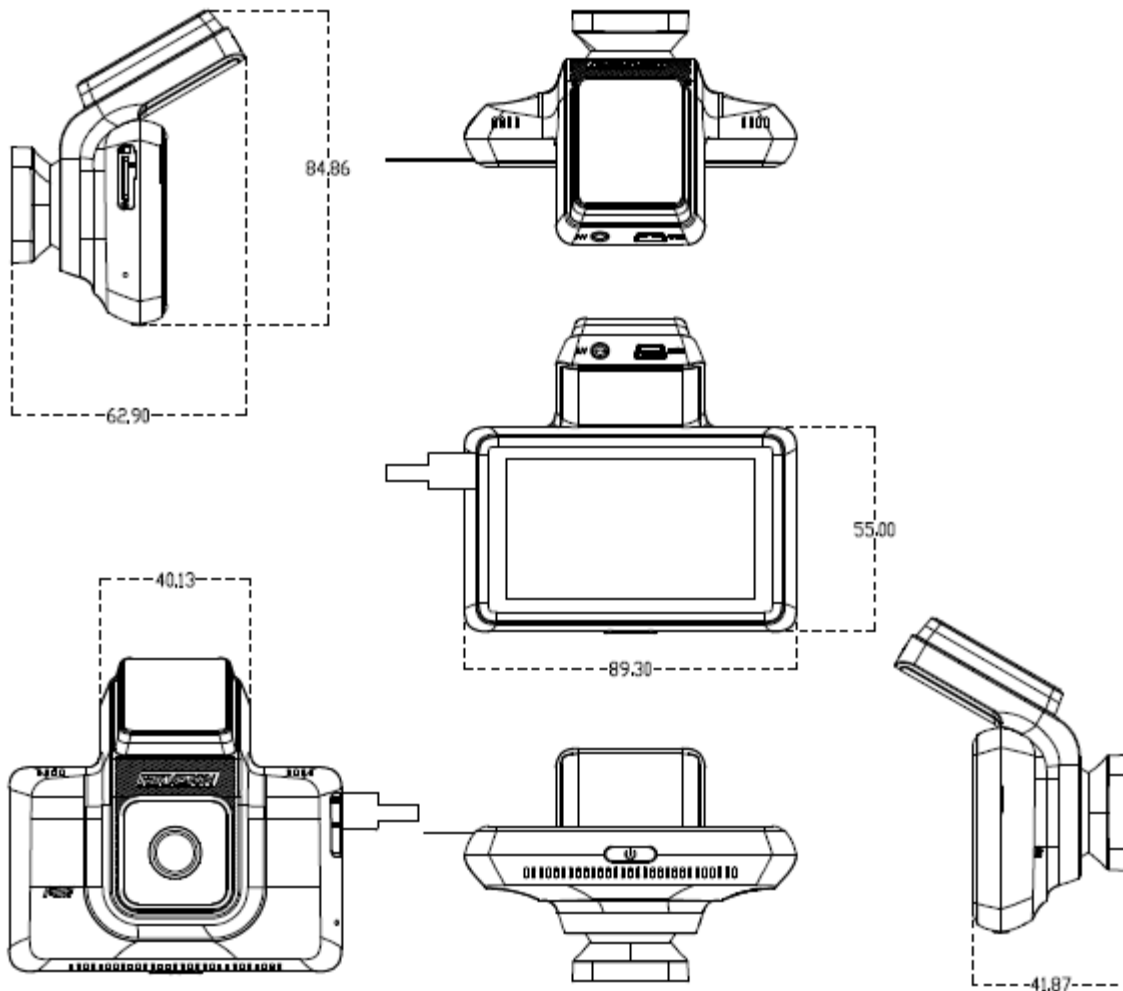
#### Available model:

AE-DC4328-K5

# Specifications




AE-DC4328-K5		
<b>Camera</b>		
Front Camera Resolution	2560 × 1440	
Rear Camera Resolution	1920 × 1080	
Video Resolution	Front Camera	1440p @ 30 fps, 1080p @ 30 fps
	Rear Camera	1080p @ 25 fps
	Screen	3-inch IPS touch screen 854 x 480
Maximum Lens Angle	Front Camera	D=123° H=105° V=56°
	Rear Camera	D=125° H=110° V=62°
	Aperture	f/1.55
	Sensor	CMOS
	Video Compression	H.265
<b>General</b>		
Power Interface	Mini USB 2.0	
Audio	Mic input, built-in speaker output	
Storage	MicroSD (TF) card, 16 GB to 256 GB	
Working Temperature and Humidity	82.4°–158° F (-20°–70° C), humidity: 0%–95% non-condensing	
Power Supply	5 VDC, 2A	
Power Consumption	4 W	
Dimensions (L x D x H)	3.52" x 2.48" x 3.34" (89.30 mm x 62.90 mm x 84.86 mm)	
Weight	<3.9 oz (<110 g)	

# Dimensions



Units: mm

## Accessories

INCLUDED		
		
3-Lead Hardware Kit Power Cable	Rear Camera Cable	Rear Camera